


# Tubular Drain Pipe Connector Installation

For any combination of 1-1/2" or 1-1/4" tubular drain pipe.



Extend, repair or alter tubular drain pipe of sinks, lavatories, laundry tubs and garbage disposers.

1. Loosen clamps and install tube connector onto pipe being connected. Make sure the end of the pipe is centered in the connector. Slightly tighten clamp.
2. Install other pipe into connector until it touches other pipe.
3. Tighten both clamps snug (10 in. lbs. torque) and test for leaks. Caution: Over-tightening of clamp can cause pipe to crush.

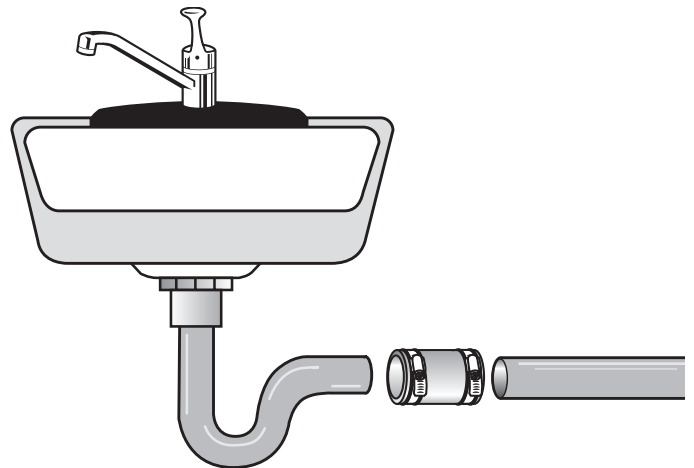

*\*Maximum test pressure  
4.3 PSI (29.6 KPA)*

**United States**  
PH: 810-653-9626  
FX: 810-653-8714

[www.fernco.com](http://www.fernco.com)

**Canada**  
PH: 519-332-6711  
FX: 519-332-8610

R1108