
JG John Guest®

Data Sheet By DS-PP1212X

3/8" Bulkhead Connector

The John Guest Polypropylene 3/8" Bulkhead Connector has been developed to satisfy the needs of the water purification industry and is more chemically resistant than acetal products. This product is NOT suitable as a tank connector.

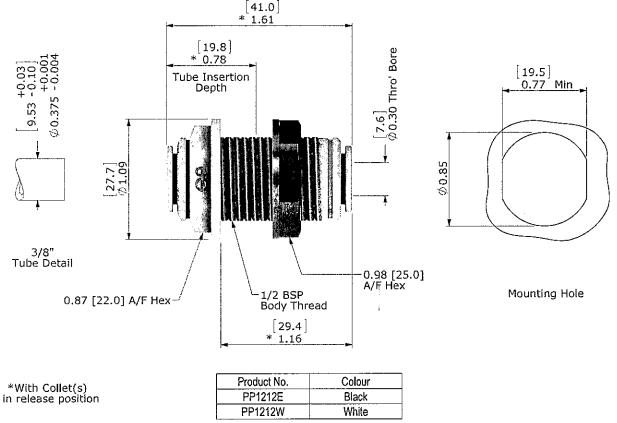

Dimensions in Inches & [mm]

Parts List			
Part Description	Material:	Part Description	Material
Body	Polypropylene (Mineral Filled), White or Black	O'Ring	Ethylene Propylene (EPDM), Black
Collet	Polypropylene (Mineral Filled), White or Black & Stainless Steel	Locknut	Brass, Bright Nickel Plate
Insert	Polypropylene (Mineral Filled), White or Black & Stainless Steel		

Technical Information.	ALC: THE STATE OF		
Working Pressures & Temperatures	Application	S	
Max 150psi at 70°F 60psi at 140°F [10bar at 20°C] [4bar at 60°C] Minimum Temperature 33°F [1°C]	Maximum Torque Potable Water 2.2 ft lbs [3.0Nm] Prinks Dispens	e ✓	

The Copyright in this drawing and the products referred thereon belong to John Guest International Limited and this drawing nor the information contained herein shall be produced in any form or used for any purpose without written consent \otimes 2013

The company has a policy of continuous research and development and reserves the right to amend without notice the specification and design of all products illustrated. For details of Terms and Conditions and any other technical enquiries, please contact our Customer Services Department on 01895 449233. Alternatively, call our Technical Helpdesk on 01895 423333

131106

