


6942

55 litre UV safe drum

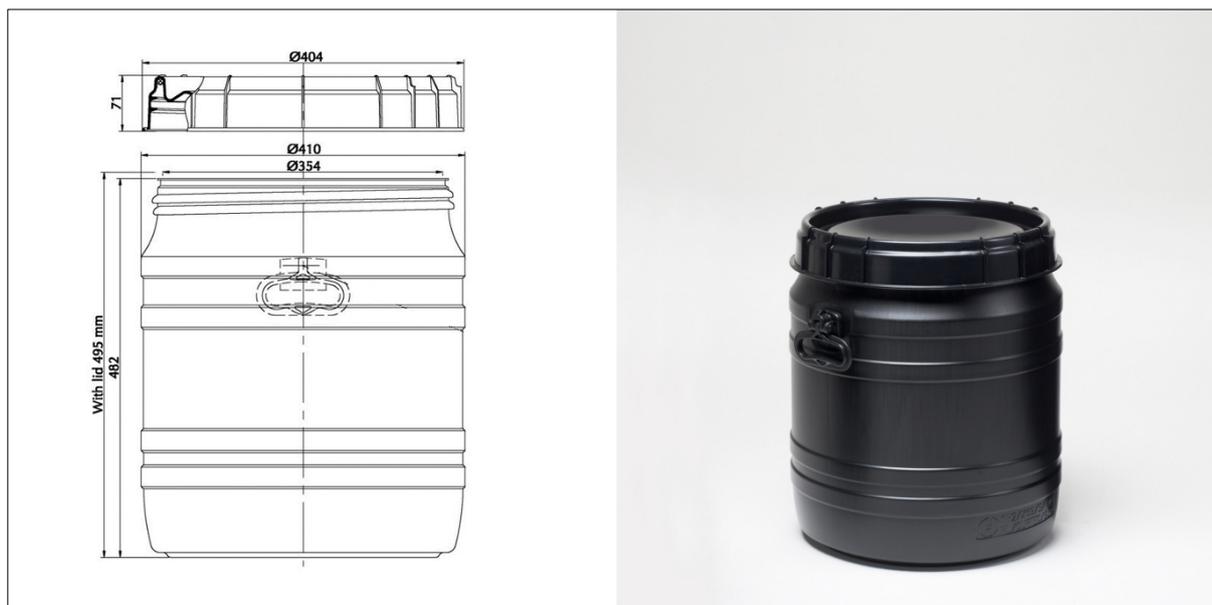

For dimensional tolerances see table on next page

Product part	Product code	Description	Material
Drum	6942B00-101	55 litre total opening drum	HDPE
Lid	A6970-13-101	Screw lid	HDPE
Gasket	H14	Sealing gasket	Rubber
Handle	A6800	Handle	HDPE

Capacity	Litres	Gallons
Brimful	56	14.8
When closed	55	14.5

Weight	Grams	Ounces
Drum	2100	74.08
Lid	650	22.93
Gasket	37	1.31
Handles	90	3.18
Total	2877	101.48

Colours	Colour code	PMS references
Container	Black 101	/
Lid	Black 101	/
Handle	Black 101	/

Hazardous material information	
Hazardous material type	Solids
Packaging group	I – II – III
UN marking	UN/1H2/X69/S/--/NL/CURTEC 934
Maximum gross mass (kg)	X=69

Product identification	
1. Manufacturer ID	
2. Country of origin	
3. Product no.	
4. Food grade	
5. Material type	
6. Date clock	
7. UN mark (on side wall)	

Other information
All UV safe drums offer complete protection against UV-light within the 200-400 nm range
Maximum filling temperature is 70°C/ 158°F
Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked
DoC available on request
UN certificate available on request
MVTR declaration available on request
User manual available on request

Wall thickness	mm
Minimal wall thickness	≥1.9
Nominal wall thickness	≥2.3

Dimensional tolerances	%
Height	±2.5
Diameter	±1.5

Weight tolerance
All products have a tolerance of ±4% on the initial weight mentioned on this data sheet

© 2015 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.