

7250

50 litre Nestable drum



For dimensional tolerances see table on next page

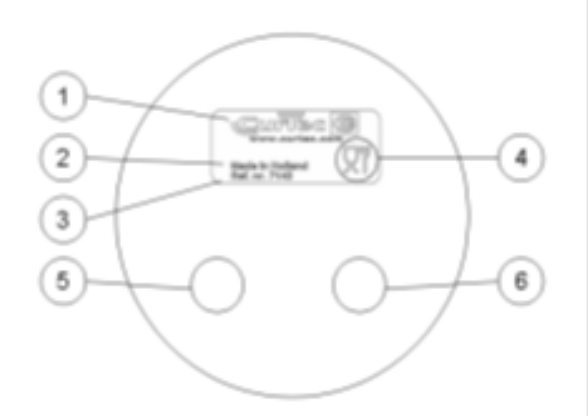
Product part	Product code	Description	Materials
Drum	7250B00-004	50 litre nestable drum	HDPE
Lid	A7140-13-605	Screw lid	HDPE
Gasket	H14	Sealing gasket	Rubber
Handle	A6800	Handle	HDPE

Capacity	Litres	Gallons
Brimful	53.5	14.1
When closed	50.5	13.3

Weight	Grams	Ounces
Drum	2125	74.96
Lid	417	14.71
Gasket	28	0.99
Handles	90	3.18
Total	2660	93.83

Colours	Colour code	PMS references
Container	White 004	/
Lid	Blue 605	301 C
Handle	Black 101	/

Hazardous material information	
Hazardous material type	Solids
Packaging group	I – II – III
UN marking	1H2/X65/Y65/Z65/S/--/NL/CurTec 3198
Maximum gross mass (kg)	X=65 Y=65 Z=65

Product identification	
1. Manufacturer ID	
2. Country of origin	
3. Product no.	
4. Food grade	
5. Material type	
6. Date clock	
7. UN mark (on side wall)	

Other information	
Maximum filling temperature is 70°C/ 158°F	
Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked	
DoC available on request	
UN certificate available on request	
MVTR declaration available on request	
Other colours available on request	
User manual available on request	

Wall thickness	
Minimal wall thickness	≥1.7
Nominal wall thickness	≥2.5

Dimensional tolerances	
Height	±2.5
Diameter	±1.5

Weight tolerance	
All products have a tolerance of ±4% of the initial weight mentioned on this data sheet	

© 2015 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.