


THREAD TO FIT
70-900^{mm}/m GCM
FINISH

 $\frac{1}{32}R$

487-013
008

 $2.856 \pm .014$

3/ POLISH EQUAL TO SPE SP1 #2 FINISH & FLASH CHROME
 2/ POLISH FREE OF TOOL MARKS
 12/ UNLESS OTHERWISE SPECIFIED
 ALL DIAMETERS CONCENTRIC WITHIN $\pm .0005$ T.I.R.


"T" @ C 2.745 ^{±.007} "E" @ C 2.656 ^{±.007}				TOLERANCES .00 = ± .005 .000 = ± .0005 .0000 = ± .0002 DEGREES ± 1 DEG. UNLESS SPECIFIED		MOLD NO. MR-701 TITLE 70-400 STOCK PLAIN ROUND CLOSURE	
LET.	DESCRIPTION	BY	DATE	DWN. RKO	DATE 11-28-87	MATERIAL & TREATMENT UREA or PHENOL	
 OWENS-ILLINOIS CLOSURE DIVISION				CKD. GES		DATE 11-30-87	
				SCALE NTS		DRAWING NUMBER C-110-68	
				ASSEMBLY		REVISION	

TECHNICAL DATA SHEET

F-217



Low Density Polyethylene

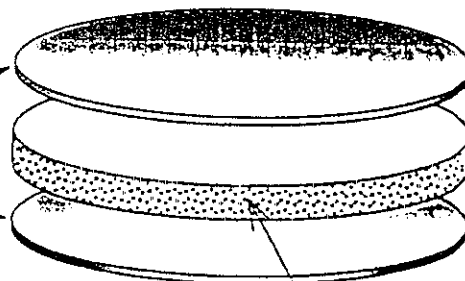

Foamed Low Density Polyethylene

Description: Three-ply co-extruded material; Foamed Low Density Polyethylene Core Between Two Solid Layers Of Low Density Polyethylene.

SPECIFICATIONS

THICKNESS			AVAILABLE WEB WIDTH		
Minimum [in]	Maximum [in]	Deviation [in]	Minimum [in]	Maximum [in]	Deviation [in]
0.020	0.060	± 0.005	1.0	25.0	± 1/16
0.065	0.090	± 0.007	1.0	9.0	± 1/16
0.095	0.125	± 0.010	1.0	9.0	± 1/16

DENSITY	Deviation
25 lbs / ft ³	± 2 lbs / ft ³

AVAILABLE IN VARIOUS DENSITIES

F-217-3	F-217-36	F-219
FDA Status: DMF 2434	FDA Status: DMF 2434	FDA Status: DMF 2434
(DENSITY)	(DENSITY)	(DENSITY)
30 ± 2 lb/ft ³	36 ± 2 lb/ft ³	19 ± 1 lb/ft ³

CODE OF FEDERAL REGULATIONS COMPLIANCE:

21 CFR 177.1210: Closures with sealing gaskets for food containers.
 21 CFR 177.1520: Olefin polymers.
 21 CFR 178.2010: Antioxidants and/or stabilizers for polymers.
 21 CFR 175.300: Resinous and polymeric coatings.

Original Date: 8 / 5 / 97
 Revision Date: 2/14 98

PATENT NO.:

4107247 / 4206165

FDA STATUS:

The component materials of F-217 F-217-3, F-217-36, F-219 are listed under DMF 2434.

The aforementioned technical information and any recommendation are based on Tri-Seal's laboratory findings and are believed to be true and accurate, but we strongly recommend that our customers perform appropriate tests they feel necessary to insure the compatibility and stability of any given product with ours. Tri-Seal International guarantees to replace any quantity proved to be defective. We will not be held liable for any injury loss or change whether direct, incidental or consequential due to the use of or inability to use the product or due to breach of warranty of any agreement existing between Tri-Seal and the purchaser. Unless contained in this data sheet or agreed to in writing by the officers of seller and user no other warranty will be honored.



ISO 9001 Certified Company
"Quality of Product First..."

DeWAL INDUSTRIES

15 RAY TRAINOR DRIVE, SAUNDERSTOWN RI, 02874 USA

D/W 202

SKIVED PTFE

PRODUCT DESCRIPTION

D/W 202 is a skived PTFE (Polytetrafluoroethylene) film held to close tolerance on width and thickness. D/W 202 conforms to ASTM D3308 Type II and SAE AMS 3662C

APPLICATION INFORMATION

D/W 202 finds use in electrical applications where high temperature service rating and superior electrical properties are desired. Examples of electrical applications include capacitor films, harnesses for electrical wiring in automotive and aerospace applications, spacers for transformers and other electrical insulation applications where high dielectric strength and high temperature resistance are requisite.

TECHNICAL DATA

PROPERTY	TEST METHOD	DATA
Backing Material		PTFE Film
Tensile Strength (psi)	ASTM-D 882	6000
Elongation (%)	ASTM-D 882	325
Dielectric Strength (Volts)	ASTM-D 149	2000
Max. Operating Temp. (F)		500
AVAILABILITY		
Core I.D.	3"	
Width (in.)	.25-11	
Thickness (mils)	.001-.090	
Max. Roll O.D. (in)	14	

*The above values are "Typical Values" which have a nominal range about them and are not intended for specification purposes. DeWAL requests the opportunity to work with you on specifications

FOR ADDITIONAL INFORMATION PLEASE CALL DeWAL 1-800-366-8356

http://www.dewal.com/user/datasheet_template.cfm

3/6/02