
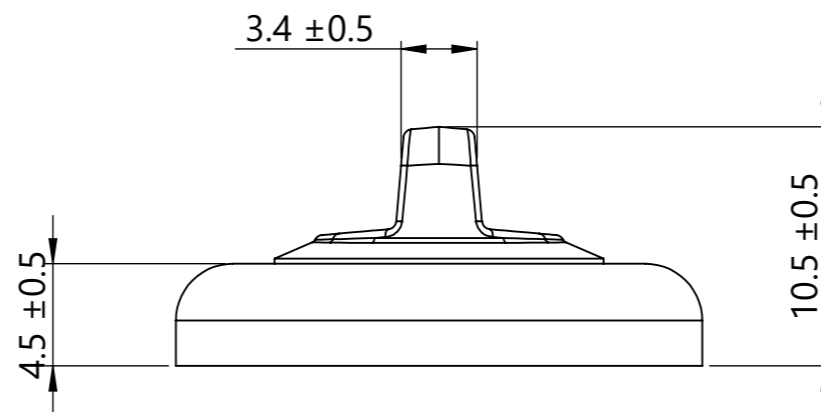



Isometric View

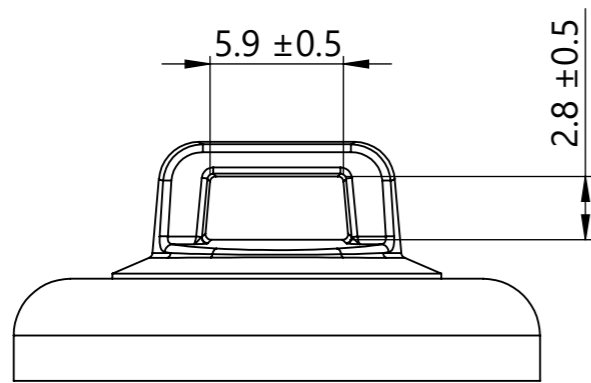

Reference:

1. Material: See chart
2. Material color: See chart
3. Min. Vertical Pull Force: 66.7N (15 lbf)
4. Maximum percent regrind permissible: 10%
5. Maximum allowable flash to be: 0.25mm
6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages


 <b>UL Listing</b>		
ANSI/UL 62275	Positioning Devices TYPE 21 E64139	66N (15 lbf) Vertical Pull
CAN	CSA-C22.2 No. 62275	
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGCTM15L-NDFEB35/POM/ST-BK	1	1	POM	-	Black
	2	1	NdFeB N35M	NiCuNi	Silver
		1	Steel	Epoxy	Black

Revision level			Revision Record	
Drawing	State	Part	ECN 017476 - Initial Release	
00.3	Design Release	-		
Changed	Date (YYYY/MM/DD)			
Johnson	2023/03/10			
Approved	Date (YYYY/MM/DD)			
Toll	2023/04/14			

The copyright of this drawing is reserved by HellermannTyton.

All drawing revision are stored in CAD PDM database



Units  
**mm**

Drawn  
Johnson  
Date (YYYY/MM/DD)  
2023/03/10

Approved  
Toll  
Date (YYYY/MM/DD)  
2023/04/14

**HellermannTyton**  
www.HellermannTyton.com

Title  
Magnetic Cable Tie Mount  
Large, 15 lbf pull rate, Black

Scale  
3:1

Global Project Number  
23-0065

Format  
A3

Sheet  
1/1

Drawing-No  
**23-0065-002-CSU**