
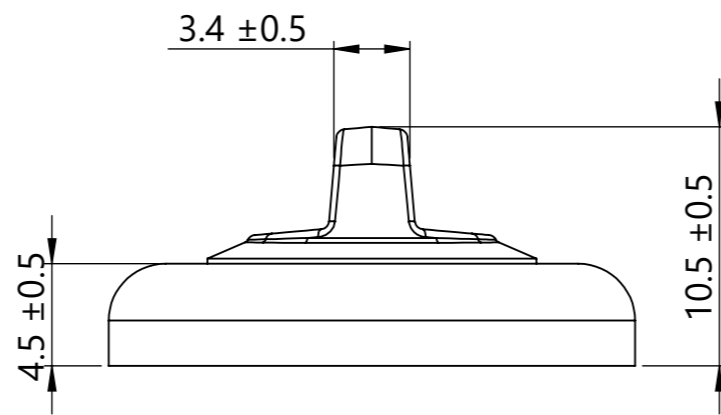


Isometric View

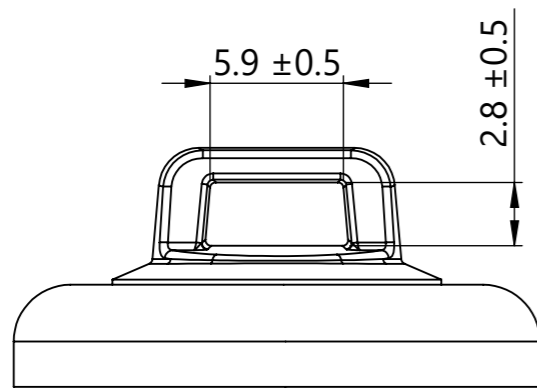

Reference:


1. Material: See chart
2. Material color: See chart
3. Min. Vertical Pull Force: 66.7N (15 lbf)
4. Maximum percent regrind permissible: 10%
5. Maximum allowable flash to be: 0.25mm
6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages

UL Listing		
ANSI/UL 62275	Positioning Devices TYPE 21 E64139	66N (15 lbf) Vertical Pull
	CAN	
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGCTM15L-NDFEB35/POM/ST-WH	1	1	POM	-	White
	2	1	NdFeB N35M	NiCuNi	Silver
		1	Steel	Epoxy	White

Revision level		
Drawing	State	Part
00.3	Design Release	-
Changed	Date (YYYY/MM/DD)	
Johnson	2023/03/10	
Approved	Date (YYYY/MM/DD)	
Toll	2023/04/14	

Revision Record	
ECN 017476 - Initial Release	



The copyright of this drawing is reserved by HellermannTyton.

All drawing revision are stored in CAD PDM database

Drawn	Date (YYYY/MM/DD)
Johnson	2023/03/10
Approved	Date (YYYY/MM/DD)
Toll	2023/04/14

Units  
mm

**HellermannTyton**  
www.HellermannTyton.com

Title	Magnetic Cable Tie Mount Large, 15 lbf pull rate, White	Scale	3:1
Global Project Number	23-0065	Format	A3
Sheet	1/1	Drawing-No	23-0065-001-CSU