
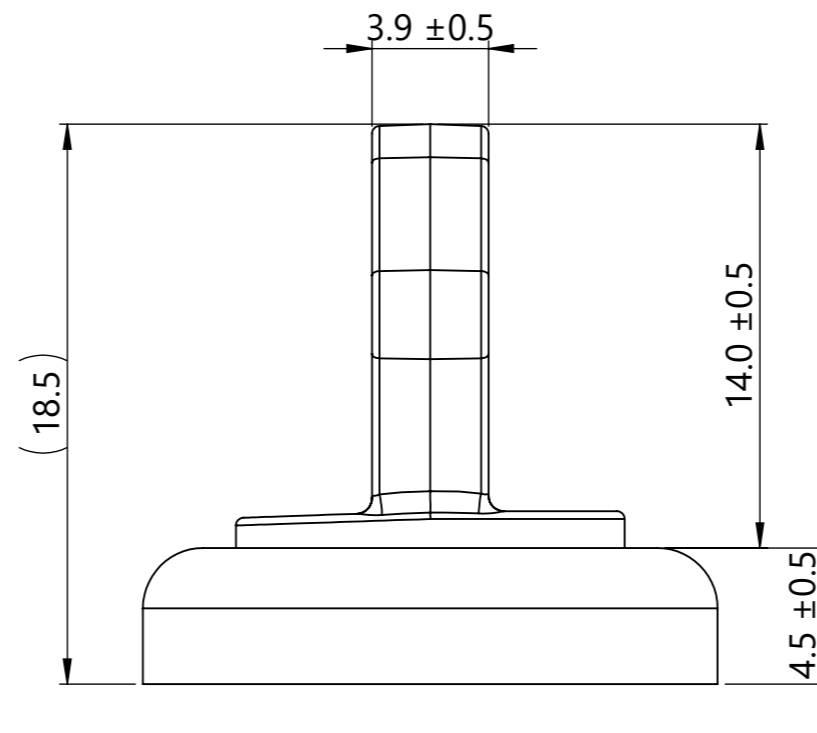



Isometric View

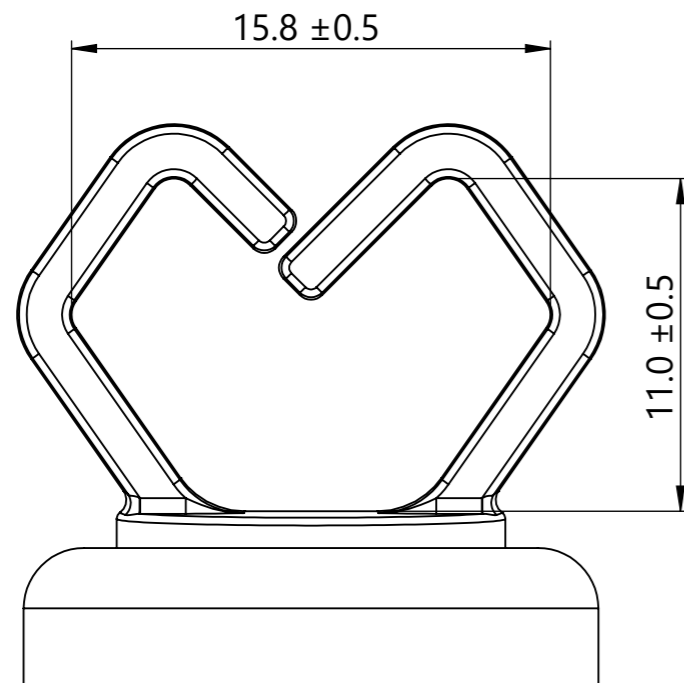

Reference:


- 1. Material: See chart
- 2. Material color: See chart
- 3. Min. Vertical Pull Force: 44.5N (10 lbf)
- 4. Maximum percent regrind permissible: 10%
- 5. Maximum allowable flash to be: 0.25mm
- 6. Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages

 UL Listing		
ANSI/UL 1565	Positioning Devices TYPE 21 E64139	44N (10 lbf) Vertical Pull
CAN	CSA-C22.2 No. 18.5	
All testing performed using 3mm min. thick 1008-1010 steel plate		

Global Part Description	Item No.	Qty.	Material	Finish	Color
MAGC10S-NDFEB35/POM/ST-POM-BK	1	1	POM	-	Black
	2	1	NdFeB N35M	NiCuNi	Silver
			Steel	Epoxy	Black

Revision level		
Drawing	State	Part
00.0	Design Release	-
Changed	Date (YYYY/MM/DD)	
Johnson	2023/04/18	
Approved	Date (YYYY/MM/DD)	
Toll	2023/04/20	

Revision Record	
ECN 017485 - Initial Release	


 The copyright of this drawing is reserved by HellermannTyton.
 All drawing revision are stored in CAD PDM database

Drawn: Johnson
 Approved: Toll
 Date (YYYY/MM/DD): 2023/04/18
 Date (YYYY/MM/DD): 2023/04/18
 Units: mm
 www.HellermannTyton.com

HellermannTyton
 Drawing-No: 23-0066-001-CSU

Title: Magnetic Clip, 1/2 in. bundle diam., Small, 10 lbf pull rate
 Scale: 4:1
 Global Project Number: 23-0066
 Format: A3
 Sheet: 1/1