


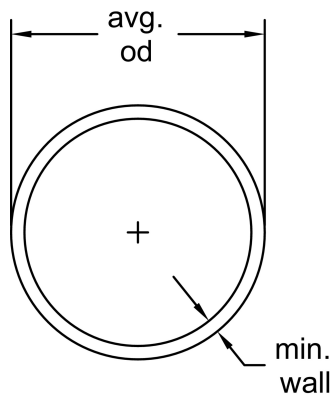

## Harvel® Schedule 40 PVC Plain End Pipe 20 Ft Lengths - Gray

- Max Water Pressure at 73°F (22.7°C) with solvent-cemented joints
- Meets NSF<sup>®</sup>-pw-G
- Non - CSA Approved

| Size<br>(inch) | P/L | Plain End<br>Code     | Lift Qty<br>(ft) | Average O.D.<br>(inch) | min. wall<br>(inch) | Wt/Ft<br>(lbs/ft) | max Pressure<br>(psi) |
|----------------|-----|-----------------------|------------------|------------------------|---------------------|-------------------|-----------------------|
| 1/8            | H16 | <b>H0400013PG2000</b> | 5700             | 0.405                  | 0.068               | 0.045             | 810                   |
| 1/4            | H16 | <b>H0400025PG2000</b> | 5700             | 0.540                  | 0.088               | 0.081             | 780                   |
| 3/8            | H16 | <b>H0400038PG2000</b> | 5700             | 0.675                  | 0.091               | 0.109             | 620                   |
| 1/2            | H16 | <b>H0400050PG2000</b> | 5700             | 0.840                  | 0.109               | 0.161             | 600                   |
| 3/4            | H16 | <b>H0400075PG2000</b> | 5260             | 1.050                  | 0.113               | 0.214             | 480                   |
| 1              | H16 | <b>H0400100PG2000</b> | 4280             | 1.315                  | 0.133               | 0.315             | 450                   |
| 1 1/4          | H16 | <b>H0400125PG2000</b> | 2360             | 1.660                  | 0.140               | 0.426             | 370                   |
| 1 1/2          | H16 | <b>H0400150PG2000</b> | 2060             | 1.900                  | 0.145               | 0.509             | 330                   |
| 2              | H16 | <b>H0400200PG2000</b> | 1660             | 2.375                  | 0.154               | 0.682             | 280                   |
| 2 1/2          | H16 | <b>H0400250PG2000</b> | 1080             | 2.875                  | 0.203               | 1.076             | 300                   |
| 3              | H16 | <b>H0400300PG2000</b> | 840              | 3.500                  | 0.216               | 1.409             | 260                   |
| 3 1/2          | H16 | <b>H0400350PG2000</b> | 680              | 4.000                  | 0.226               | 1.697             | 240                   |
| 4              | H16 | <b>H0400400PG2000</b> | 520              | 4.500                  | 0.237               | 2.006             | 220                   |
| 5              | H16 | <b>H0400500PG2000</b> | 400              | 5.563                  | 0.258               | 2.726             | 190                   |
| 6              | H16 | <b>H0400600PG2000</b> | 340              | 6.625                  | 0.280               | 3.535             | 180                   |
| 8              | H16 | <b>H0400800PG2000</b> | 220              | 8.625                  | 0.332               | 5.305             | 160                   |
| 10             | H16 | <b>H0401000PG2000</b> | 80               | 10.750                 | 0.365               | 7.532             | 140                   |
| 12             | H16 | <b>H0401200PG2000</b> | 60               | 12.750                 | 0.406               | 9.949             | 130                   |
| 14             | H16 | <b>H0401400PG2000</b> | 60               | 14.000                 | 0.437               | 11.810            | 130                   |
| 16             | H16 | <b>H0401600PG2000</b> | 60               | 16.000                 | 0.500               | 15.416            | 130                   |
| 18             | H16 | <b>H0401800PG2000</b> | 40               | 18.000                 | 0.562               | 20.112            | 130                   |
| 20             | H16 | <b>H0402000PG2000</b> | 40               | 20.000                 | 0.593               | 23.624            | 120                   |
| 24             | H16 | <b>H0402400PG2000</b> | 40               | 24.000                 | 0.687               | 32.873            | 120                   |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
info.ps@georgfischer.com Internet: <http://www.gfps.com>