


# CLAM SHELL HAND SEALER

## ● CONSTRUCTION

MODEL NO: AIE-772

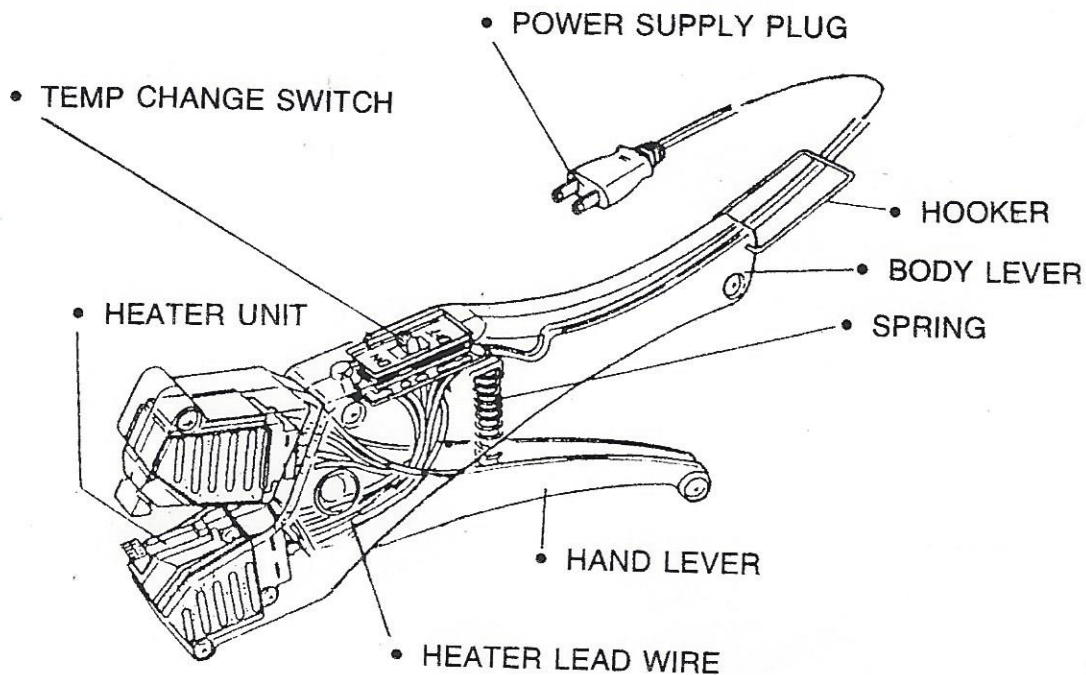

## ● USAGE

- \* TO SPOT SEAL OPS, PSP, PVC, AND EPS FOOD. PACKING CASES FOR SHOPS, STORES, HOUSES, MILL, RESTAURANT, HOTEL.

## ● FEATURE

- \* LIGHT WEIGHT.
- \* EASY TO OPERATE.
- \* CONSTANT HEAT WELD, SOLD AND FIRM.
- \* REGULATABLE IN HIGH OR LOW TEMPERATURE SUITED TO ANY THICKNESS.

## ● SPECIFICATION

VOLTAGE	WATT	HEATER TEMP	DIMENSION	WEIGHT
110~240VAC	14.5W	LOW 180°C HIGH 210°C	13×24×4CM	300g

## ● OPERATING INSTRUCTIONS

- \* PLEASE CHECK THE VOLTAGE OF POWER SOCKET, THEN INSERT THE POWER PLUG INTO SOCKET.
- \* ACCORDING TO THE THICKNESS OR VARIETY OF POLY-CASE, PUSH THE SLIDE SWITCH TO HIGH OR LOW POSITION, AFTER 2-3 MINUTES, THE TEMPERATURE IS RAISED.
- \* WHILE THE TEMPERATURE RAISED TO SUITABLE DEGREE PUT THE POLY-CASE EDGE BE GRIPED BY THE HEATER UNIT OF THIS MACHINE THROUGH ONE SECOND, THEN A EXCELLENT AND SOLD POINT WELD APPEAR.
- \* IF THE WELDING APPEARANCE IS BREAK OR DAMAGE PLEASE REGULATE SLIDE SWITCH TO LOW POINT.
- \* IF THE WELDING APPEARANCE IS NON-FULL-WELD, PLEASE REGULATE SLIDE SWITCH TO HIGH POINT.

## ● HELPFUL INFORMATION

- \* NEVER TOUCH TO HEATER UNIT FOR HIGH TEMPERATURE.
- \* NEVER STEEPED WITH WATER OR OTHER LIQUID.
- \* NEVER SHOCK OR DROP DOWN.
- \* NEVER GRIPED WITH NOTHING THE JAW OF HEATER UNIT FOR PROTECTING TEFLON COATING.
- \* KEEP THE JAW OF HEATER UNIT CLEANING CONSTANTLY.

## ● CONNECTION DIAGRAM

