


REV	DATE	NOTES
A	10/17/06	Initial Release
B	11/15/13	Specifications updated per ANSI/UL 62275 update

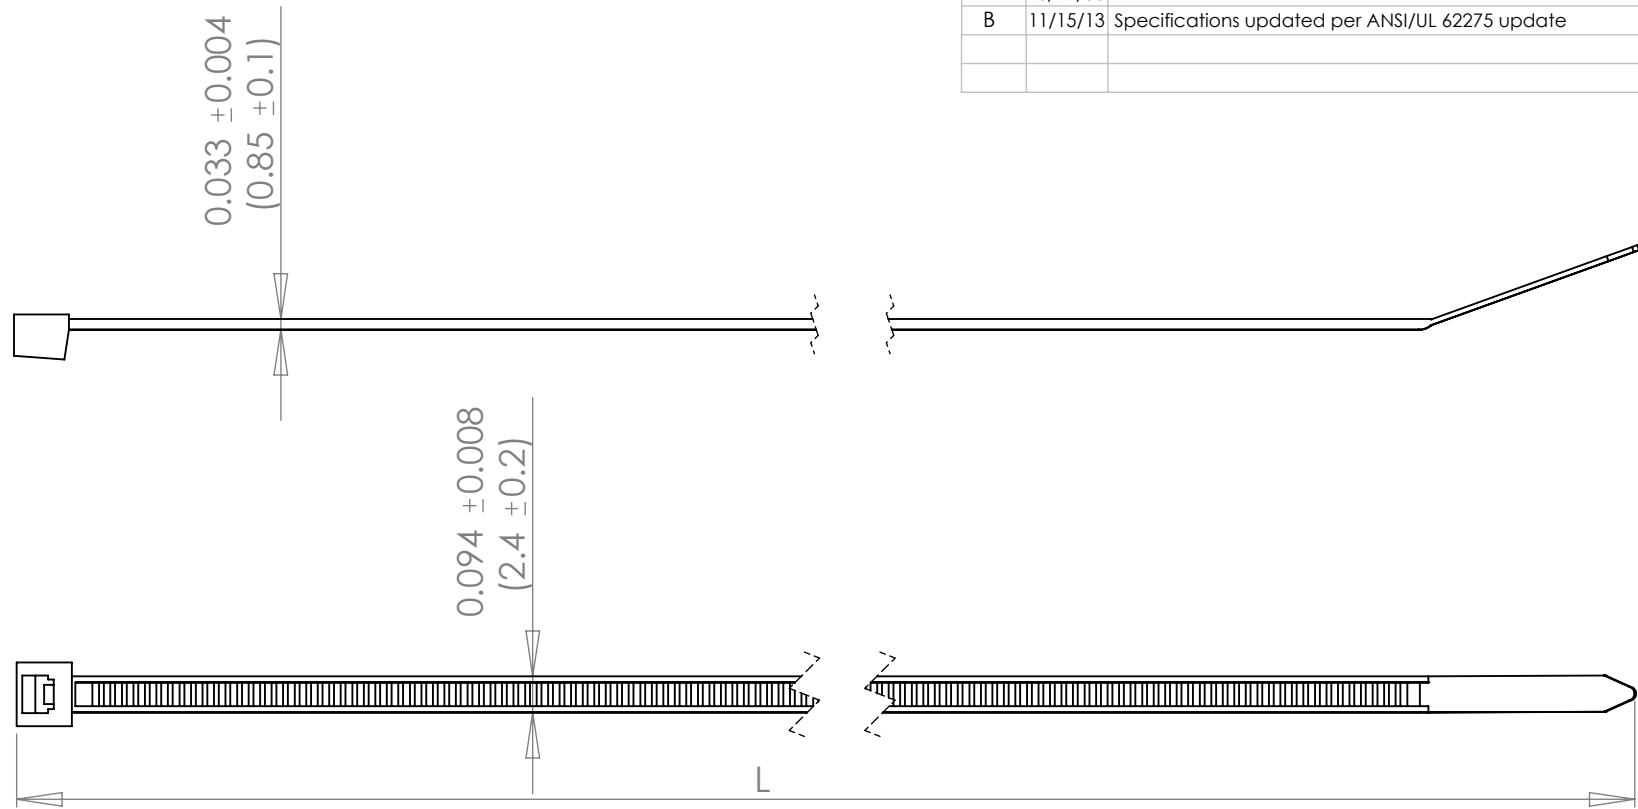

Model Number	Approx Length "L"	Min Bundle Diameter	Max Bundle Diameter
CT4-18	4" (100mm)	0.157" (4mm)	0.866" (22mm)
CT5-18	5" (140mm)		1.229" (33mm)
CT8-18	8" (200mm)		2.087" (53mm)

*Suffix "-9" indicates Natural and "-0W" indicates UV Black
 *See Cambridge Catalog for Packaging Options and Designations

Notes:

1. Minimum Loop Tensile Strength: 18lb (80N)
2. Operating Temperature: -4°F to 185°F (-20°C to 85°C)
3. Minimum Installation Temperature: 5°F (-15°C)
4. UV Black ties are rated for outdoor use per ANSI/UL 62275
5. Usage Recommendations: The cable ties must be stored at room temperature in at least 50% humidity (recommended 80%RH) in a completely sealed polyethylene bag if not being used. In extreme heat and cold, limit the exposure of unused cable ties. If after being exposed to extreme temperatures and/or extreme relative humidities, the cable ties must be allowed to be stored at room temperature and at least 50% humidity (recommended 80%RH) for at least 24 hrs in a sealed bag before being used again

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **CAMBRIDGE RESOURCES**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF **CAMBRIDGE RESOURCES** IS PROHIBITED.

NAME		DATE		CAMBRIDGE	
DRAWN J Li		10/17/06			
UNLESS OTHERWISE SPECIFIED:				960 Alabama Ave, Brooklyn, NY 11207 P:718-649-1666 F:718-485-4403	
DIMENSIONS ARE IN INCHES [] DENOTES MILLIMETER				TITLE: Cambridge Cable Ties 18lb Tensile Strength	
MATERIAL Nylon 6,6 94V-2		SIZE A	DWG. NO. CT-18 REV B	REV B	
DO NOT SCALE DRAWING		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	