

PMC12 SERIES CONNECTOR






The 1/8" flow polypropylene PMC12 offers many of the same configuration options as the PMC. The polypropylene material adds greater chemical resistance and is gamma sterilizable. The PMC12 also mates to small diameter rigid tubing. Available with a 1/4-28 flat bottom port and 1/4-28 UNF threads, these couplings eliminate the need to thread and re-thread common compression nuts each time a tubing connection is made.

FEATURES

- Polypropylene material
- EPDM o-ring
- CPC thumb latch
- Integral terminations

BENEFITS

- Chemically resistant and gamma-sterilizable
- Greater chemical resistance
- One-hand connection and disconnection
- Fewer leak points, shorter assemblies, faster installations

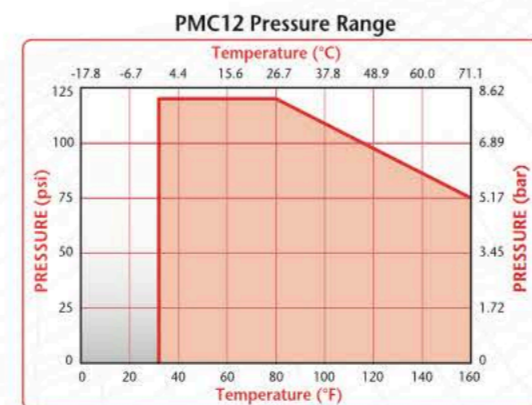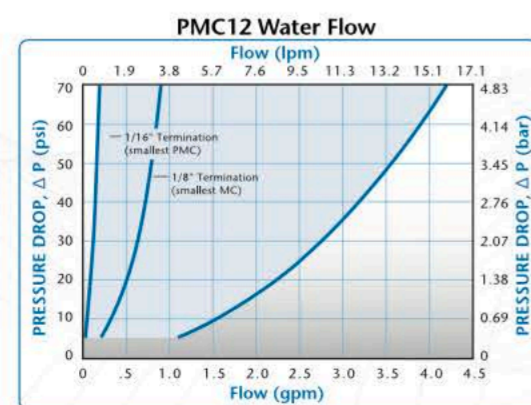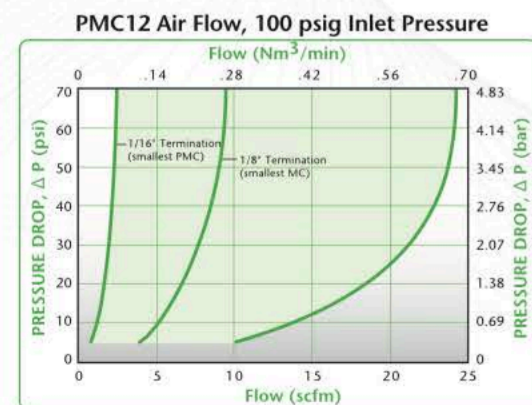

These graphs are intended to give you a general idea of the performance capabilities of each product line. The shaded area of each graph represents the operating range of the product family, i.e., upper and lower values are shown. Therefore, depending on the exact coupling configurations selected, you can reasonably expect values to fall within the shaded area.

Specifications

PRESSURE:

Vacuum to 120 psi, 8.3 bar

TEMPERATURE:

32°F to 160°F (0°C to 71°C)

MATERIALS:

- Main components and valves: Polypropylene
- Thumb latch: Stainless steel
- Valve spring: 316 stainless steel
- External spring and pin: Stainless steel
- O-rings: EPDM

STERILIZATION:

Gamma: Up to 50 kGy irradiation

COLOR:

Almond

TUBING SIZES:

Microbore to 1/4" ID, Microbore to 6.4mm ID

WARNING: Pressure, temperature, chemicals, and operating environment can affect the performance of couplings. It is the customer's responsibility to test the suitability of CPC products in their own application conditions. Use the graph to the right as a guide.

NOTES:

Liquid Flow Rate Information for Couplings

The chart below shows the flow rate for CPC couplings. Each coupling was tested with water at 70°F (21°C). To determine flow rates for specific coupling configurations use the formula at the right.

$$Q = C_v \sqrt{\frac{\Delta P}{S}}$$

- Q = Flow rate in gallons per minute
- C_v = Average coefficient across various flow rates (see chart)
- ΔP = Pressure drop across coupling (psi)
- S = Specific gravity of liquid

C_v VALUES FOR 1/8" FLOW PMC12 COUPLINGS

BODIES	INSERTS																			
	PMC 200412	PMCD 200412	PMC 200612	PMCD 200612	PMC 220212	PMCD 220212	PMC 220412	PMCD 220412	PMC 240212	PMCD 240212	PMC 240412	PMCD 240412	PMC 230412	PMCD 230412	PMC 210412	PMCD 210412	PMC 220312	PMCD 220312	PMC 220112	PMCD 220112
PMC100212	.40	.18	.50	.19	.25	.16	.50	.19	.50	.20	.51	.50	.38	.24	.30	.17	.03	.03		
PMCD100212	.27	.18	.31	.18	.24	.16	.28	.20	.26	.20	.29	.26	.27	.24	.25	.17	.03	.03		
PMC100412	.40	.21	.50	.24	.26	.18	.50	.24	.50	.20	.51	.50	.38	.26	.30	.19	.03	.03		
PMCD100412	.29	.19	.32	.23	.25	.17	.30	.23	.27	.21	.28	.28	.29	.24	.25	.18	.03	.03		
PMC120412	.40	.18	.50	.18	.25	.16	.40	.18	.40	.16	.36	.40	.38	.21	.30	.17	.03	.03		
PMCD120412	.21	.17	.22	.17	.20	.16	.22	.17	.21	.17	.20	.22	.21	.18	.21	.16	.03	.03		
PMC160212	.23	.15	.28	.18	.19	.14	.27	.15	.27	.15	.28	.27	.23	.16	.20	.14	.03	.03		
PMCD160212	.19	.15	.19	.15	.17	.14	.19	.15	.18	.15	.18	.19	.19	.15	.18	.14	.03	.03		
PMC160412	.33	.23	.44	.24	.24	.18	.44	.23	.44	.20	.38	.44	.33	.26	.26	.19	.03	.03		
PMCD160412	.23	.17	.26	.21	.22	.16	.26	.21	.26	.19	.25	.26	.23	.24	.22	.16	.03	.03		
PMC170312	.25	.20	.30	.20	.20	.17	.30	.20	.30	.19	.28	.30	.25	.18	.21	.17	.03	.03		
PMCD170312	.20	.17	.20	.17	.19	.15	.21	.17	.19	.17	.20	.20	.20	.16	.19	.16	.03	.03		
PMC170112	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.02	
PMCD170112	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.03	.02	.02