

Colors available




Applications

PolyLite™ PLA Pro is a first of its kind: combining high toughness and rigidity. This professional PLA offers engineering properties with the ease of print as regular PLA. This makes it a good candidate for wide applications covering functional prototyping, jigs and fixtures as well as final parts.

Printing Settings

Printing temp.: 190-220°C
Printing speed: 30-70mm/s
Bed temp.: 30-60°C
Chamber temp.: N/A
Fan: ON
Drying settings: 55°C for 6h
Annealing: N/A

Material Properties

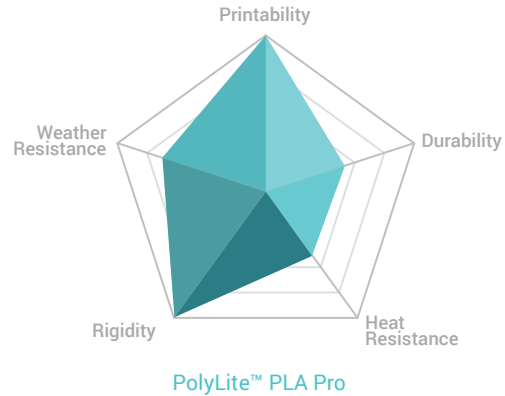

Key features



Excellent printability



High impact strength



Easy to use

