




# BACKDRAFT DAMPER - Metric

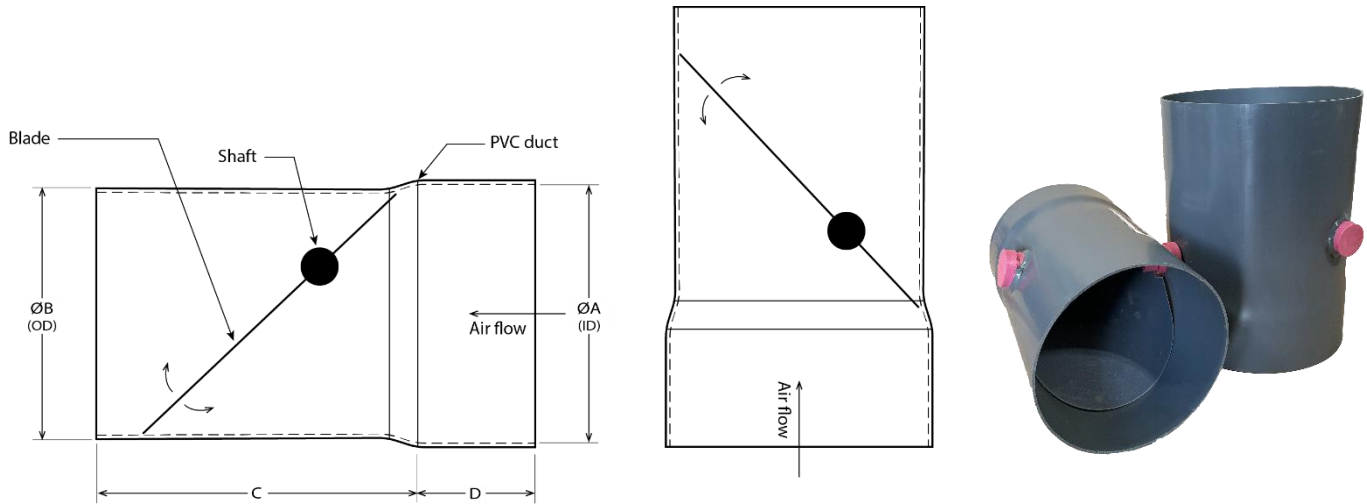

Model Number	A in (mm)	B in (mm)	C in (mm)	D in (mm)	Weight Lbs (kg)
BD125	4.92 (125)	4.92 (125)	6.3 (160)	2.36 (60)	0.6 (0.3)
BD160	6.3 (160)	6.3 (160)	7.87 (200)	2.36 (60)	1 (0.5)
BD200	7.87 (200)	7.87 (200)	8.26 (210)	2.36 (60)	1.4 (0.63)
BD250	9.84 (250)	9.84 (250)	10.24 (260)	2.36 (60)	3 (1.4)
BD315	12.4 (315)	12.4 (315)	11.4 (290)	2.36 (60)	4 (1.8)

## FEATURES

Backdraft damper or gravity damper designed to operate in ducting where highly corrosive air is present and to prevent re-entrainment of toxic air back into the building or public areas.

- Recommended up to 140°F.
- All PVC internal parts.
- Allows for less than 5% air-flow restriction.
- Offers an approximate 95% seal.
- Has bell end sockets and a minimum socket depth of 2" or more except on the 4" model, which is 1.75"
- **Can be installed in vertical position only.**
- Wall thickness: 0.1"

<b>Project Name</b>	
<b>Date</b>	
<b>Engineer / Sales Rep</b>	
<b>Client</b>	
<b>Contractor</b>	

Property rights to all drawings, details, representations, ideas, data, notes and specifications either copies or originals thereof that may be incorporated into the design and/or project are the property solely of Plastec Ventilation, Inc. Permission for any copies of said copyrighted materials, drawings, details, representations, ideas, data, notes and specifications either originals or copies thereof to be made, copied or altered by any person, business, or corporation may only be authorized with the expressed written permission of Plastec Ventilation, Inc. By the use of this data, the user acknowledges that he/she has read and understand all of the notes included herein.