

# TANK ALARM SPECIFICATIONS -PP

## OVERALL

Ingress rating.....IP65 and NEMA4X. (corrosion proof)  
 Temperature.....-40 to 195°F  
 Enclosure.....PVC with PVC elastomer gasket.  
 Enclosure screws.....316 stainless  
 Beacon lens.....Lexan

## COMPONENTS

**Pipe**..... $\frac{3}{4}$ " Schedule 80, polypropylene  
 [1.05" O.D.]

**Float switch**.....Polypropylene

### Buzzer


Volume .....103dB at 2 ft  
 Diaphragm .....316 stainless  
 Body.....PPE  
 Gasket.....BUNA rubber

### Power

Battery.....Lithium Mn Dioxide  
 Lithium weight.....1.2g  
 Voltage.....9VDC  
 Capacity.....1200 mA-hr  
 Power when idle.....11µA  
 Power use during alarm.....20mA

### Mounting

Thumbscrew or Compression mount both have PVC body.  
 Thumbscrew has 304 SS threads, phenolic head.  
 Compression mount has BUNA gland.

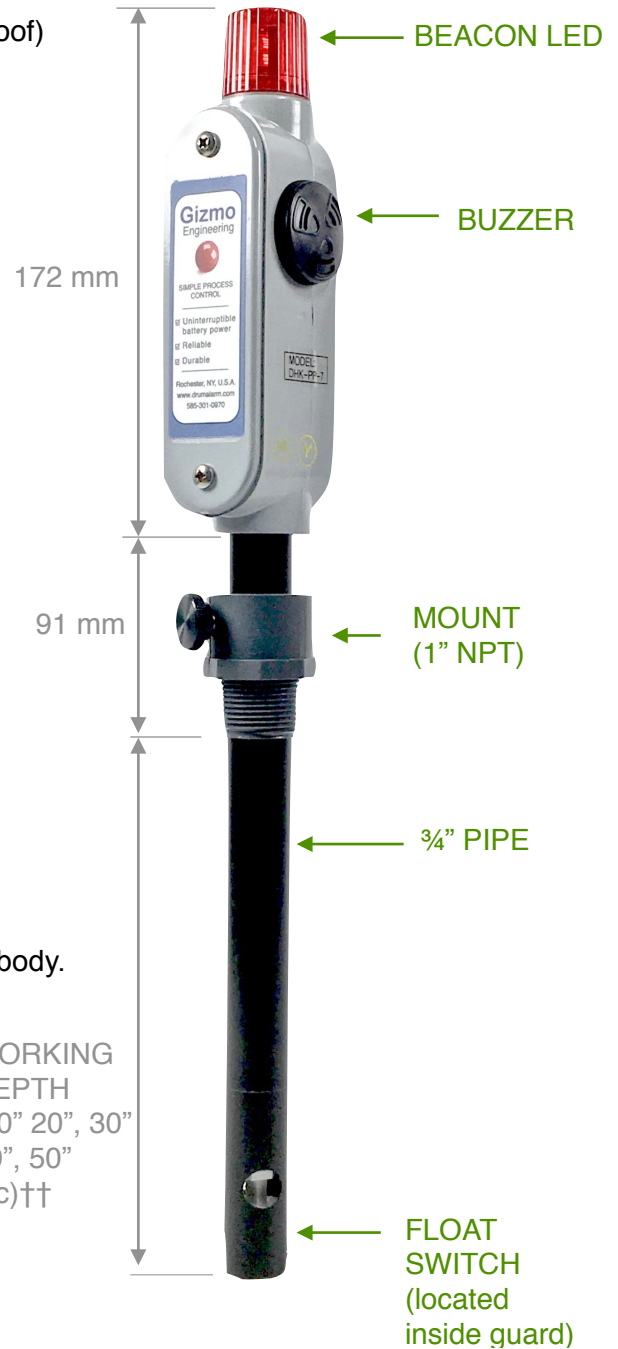

THUMBSCREW    COMPRESSION