

YS Series Y-Strainers

1/2" TO 4" PVC, CLEAR PVC AND CPVC

KEY FEATURES

- PVC, Clear PVC and CPVC
- Horizontal or Vertical Installation
- FPM or EPDM O-Ring Seals
- 2:1 Open Area Ratio
- Hex Cap for Easy Access to Screen
- Standard Screen has 1/32" Perforation

OPTIONS

- Stainless Steel Perforated or Mesh Strainer Screens Available in Various Sizes
- True Union Connection

MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- Clear PVC Cell Class 12454 per ASTM D1784
- CPVC Cell Class 23447 per ASTM D1784
- FPM and EPDM O-Ring Seals



TECHNICAL INFORMATION

BASKET OPTIONS

PERFORATION SIZES	MESH SIZES	BASKET MATERIAL
1/32"	20	SSTL, Hastelloy, Monel and Titanium
1/16"	40	
1/8"	60	
5/32"	80	
3/16"	100	
1/4"	200	
3/8"	325	
1/32"	N/A	PVC, CPVC and PP
1/16"		
1/8"		
3/16"		

SELECTION CHART

SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/2" – 4" (DN15 – DN100)	PVC or CPVC	Socket, Threaded, Flanged or True Union	FPM and EPDM	150 PSI @ 70°F Non-Shock
1/2" – 2" (DN15 – DN50)	Clear PVC			



YS Series Y-Strainers

1/2" TO 4" PVC, CLEAR PVC AND CPVC

TECHNICAL INFORMATION, CONTINUED

PARTS LIST

1. Cap
2. O-Ring Seal
3. Screen
4. Body

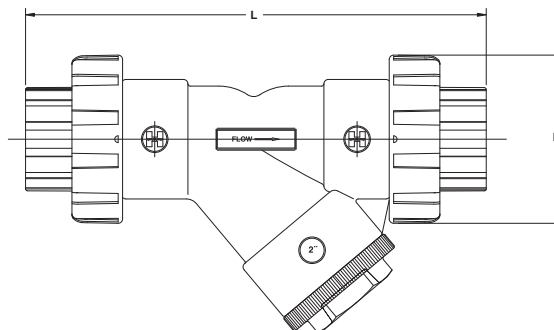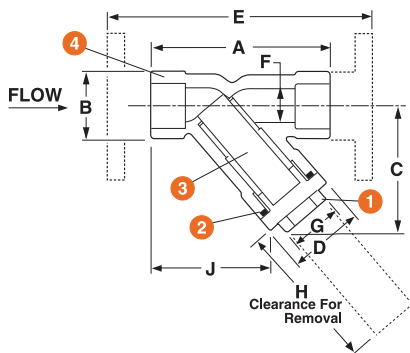

DIMENSIONS – INCHES / MILLIMETERS

SIZE in / DN	A in / mm	B in / mm	C in / mm	D in / mm	E in / mm	F in / mm	G in / mm	H in / mm	J in / mm	K in / mm	L in / mm	WEIGHT lbs / kg	
												SOC / THD	FLANGED
1/2 / 15	3.38/86	1.38/35	2.25/57	1.50/38	NA	.56/14	1.00/25	2.13/54	2.50/64	2.25/57	6.64/167	.25/.11	NA
3/4 / 20	4.18/106	1.69/43	2.88/73	2.00/51	NA	.81/21	1.25/32	2.75/70	3.00/76	2.63/67	7.42/188	.63/.29	NA
1 / 25	5.19/132	2.00/51	3.63/92	2.16/55	NA	1.00/25	1.50/38	3.30/84	3.32/84	3.00/76	8.97/228	.88/.40	NA
1-1/4 / 32	6.63/168	2.63/67	4.50/114	2.94/75	NA	1.25/32	2.00/51	4.50/114	4.45/113	4.75/121	13.01/330	1.75/.79	NA
1-1/2 / 40	6.63/168	2.63/67	4.50/114	2.94/75	NA	1.56/40	2.00/51	4.50/114	4.45/113	4.75/121	12.07/307	1.63/.74	NA
2 / 50	7.63/194	3.38/86	5.38/137	3.75/95	11.00/279	2.00/51	2.38/60	5.06/129	4.88/124	4.75/121	13.05/331	3.00/1.36	5.00/2.27
2-1/2 / 63	10.31/262	4.69/119	7.25/184	5.25/133	NA	2.90/74	3.50/89	6.60/168	6.54/166	6.40/163	16.77/426	7.75/3.52	NA
3 / 80	10.31/262	4.69/119	7.25/184	5.50/140	14.37/365	2.90/74	3.50/89	6.60/168	6.54/166	6.40/163	16.77/426	7.50/3.40	12.25/5.56
4 / 100	12.81/325	5.75/146	8.88/226	6.18/157	17.73/450	3.78/96	4.25/108	8.00/203	8.58/218	8.56/217	21.23/539	9.50/4.30	17.50/7.94

Dimensions are subject to change without notice – consult factory for installation information

Cv VALUES*

SIZE in / DN	Cv VALUES GPM	SIZE in / DN	Cv VALUES GPM
1/2 / 15	4.0	2 / 50	28
3/4 / 20	6.8	2-1/2 / 63	40
1 / 25	9.0	3 / 80	65
1-1/4 / 32	12	4 / 100	100
1-1/2 / 40	28		


* With 1/32" plastic screen

PRESSURE LOSS CALCULATION FORMULA

$$\Delta P = \left[\frac{Q}{C_v} \right]^2$$

ΔP = Pressure Drop
 Q = Flow in GPM
 C_v = Flow Coefficient

OPERATING TEMPERATURE / PRESSURE

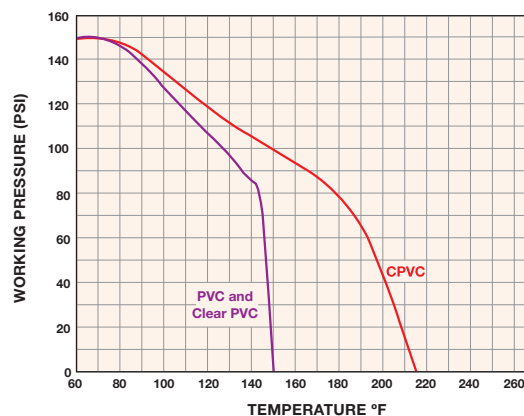

Contact Hayward Flow Control with questions: 1-888-429-4635 • Fax: 1-888-778-8410 • One Hayward Industrial Drive • Clemmons, NC 27012 • USA
 Visit us at: www.haywardflowcontrol.com • E-mail: hflow@haywardnet.com