
## 7276

## **75 litre Nestable drum**

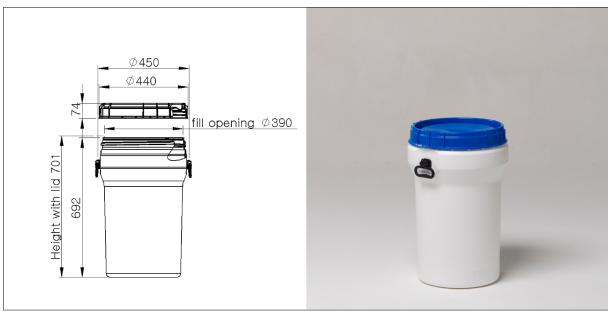

For dimensional tolerances see table on next page

Product part	Product code	Description	Materials
Drum	7276B00-004	75 litre nestable drum	HDPE
Lid	A6990-23-605	Screw lid	HDPE
Gasket	H14	Sealing gasket	Rubber
Handle	A6800	Handle	HDPE

Capacity	Litres	Gallons
Brimful	80	21.1
When closed	76	20.1

Weight	Grams	Ounces
Drum	3025	106.70
Lid	740	26.10
Gasket	44	1.55
Handles	90	3.18
Total	3899	137.53

Colours	Colour code	PMS references
Container	White 004	/
Lid	Blue 605	301 C
Handle	Black 101	/



Hazardous material information	
Hazardous material type	Solids
Packaging group	I – II – III
UN marking	UN/1H2/X75/S//B/CURTEC-140180
Maximum gross mass (kg)	X=75 Y=113 Z=150

1 4
-----

## Other information

Maximum filling temperature is 70°C/ 158°F

Contents must have cooled to 30°C/86°F before containers can be closed and stacked

DoC available on request

UN certificate available on request

MVTR declaration available on request

Other colours available on request

User manual available on request

Wall thickness	mm
Minimal wall thickness	≥1.9
Nominal wall thickness	≥2.7

Dimensional tolerances	%
Height	±2.5
Diameter	±1.5

Weight tolerance	Í
All products have a tolerance of ±4% of the initial weight mentioned on this data sheet	1

© 2015 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.

Last revision: 31 March 2015

