


7240

40 litre Nestable drum

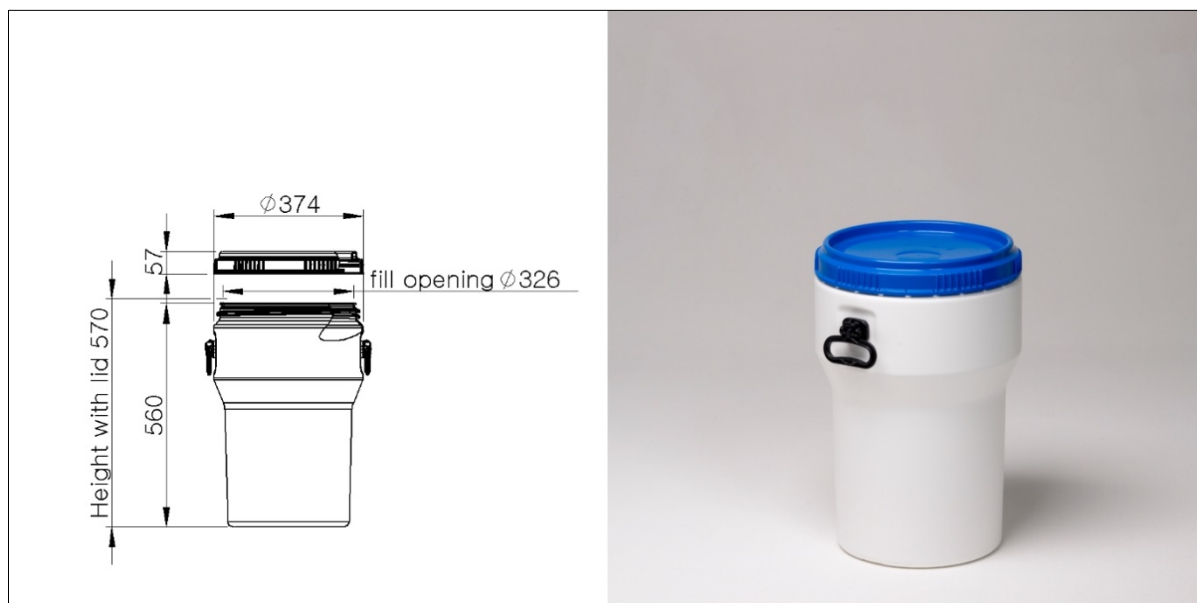

For dimensional tolerances see table on next page

Product part	Product code	Description	Materials
Drum	7240B00-004	40 litre nestable drum	HDPE
Lid	A7140-13-605	Screw lid	HDPE
Gasket	H14	Sealing gasket	Rubber
Handle	A6800	Handle	HDPE

Capacity	Litres	Gallons
Brimful	47	12.4
When closed	44	11.6

Weight	Grams	Ounces
Drum	1910	67.37
Lid	417	14.71
Gasket	28	0.99
Handles	90	3.18
Total	2445	86.25

Colours	Colour code	PMS references
Container	White 004	/
Lid	Blue 605	301 C
	White 004	/
Handle	Black 101	/

Hazardous material information	
Hazardous material type	Solids
Packaging group	I – II – III
UN marking	1H2/X65/Y65/Z65/S/--/NL/CurTec 3198
Maximum gross mass (kg)	X=65 Y=65 Z=65

Product identification	
1. Manufacturer ID	
2. Country of origin	
3. Product no.	
4. Food grade	
5. Material type	
6. Date clock	
7. UN mark (on side wall)	

Other information
<p>Maximum filling temperature is 70°C/ 158°F</p> <p>Contents must have cooled to 30°C/ 86°F before containers can be closed and stacked</p> <p>DoC available on request</p> <p>UN certificate available on request</p> <p>MVTR declaration available on request</p> <p>Other colours available on request</p> <p>User manual available on request</p>

Wall thickness	mm
Minimal wall thickness	≥1.7
Nominal wall thickness	≥2.5

Dimensional tolerances	%
Height	±2.5
Diameter	±1.5

Weight tolerance
All products have a tolerance of ±4% of the initial weight mentioned on this data sheet

© 2015 Property of CurTec International B.V. All rights explicitly reserved, it is not allowed to copy or communicate to other parties without written consent of CurTec.